TopBrewer

Pre-installation guide




TopBrewer Pro
with Smart Fridge

Installation Requirements



TopBrewer Pro




Smart Fridge

TopBrewer
Touchfree Coffee Concept

UNIT DETAILS		TopBrewer Pro	Smart Fridge			
Installation Dimensions (WxDxH)		224 x 534 x 667 mm	230 x 390 x 530 mm			
Packing Dimensions (WxDxH)		320 x 660 x 790 mm				
Weight, gross.		60 kg	17,5 kg			
Weight, net.		56 kg	15,5 kg			
Bean/Carton Capacity		2 x 1.4 kg	Up to 9 L			
Throughput/hour		180 cups				
Approvals		CE, ETL/UL, CB, NSF	CE, ETL/UL			
Power	EU	**6900 Watt** 208-240V, 30 Amp, single phase **OR** 400V, 3 phase, 16 Amp **2300 Watt (Alternative)** 208-240V, 10 Amp, single phase	208-240V, 50/60 Hz, 4 Amp 3-pin plug point for each unit.			
Water		Direct Water Connection, ¾" type shutoff valve Water pressure: 200kPa (2 bar) – 600 kPa (6 bar)		-	-	-
Filtration		TopBrewer water filters filled in a location adjacent to the TopBrewer. Dedicated steam filter required. *See **plumbing section**	TopBrewer ActiveCoal 10.000, optional, purifies the water with active coal	-	-	-
Drainage		Waste U-pipe, ≈40mm. Manifold/drain plug (included, see **plumbing section**) is inserted and components are connected here.				
Ventilation		Duct Fan Ventilation required. Cooler produces a lot of heat, which needs to be able to exit as per installation instructions in **carpenter section**.				

Cabinet dimensions & ventilation cut-outs

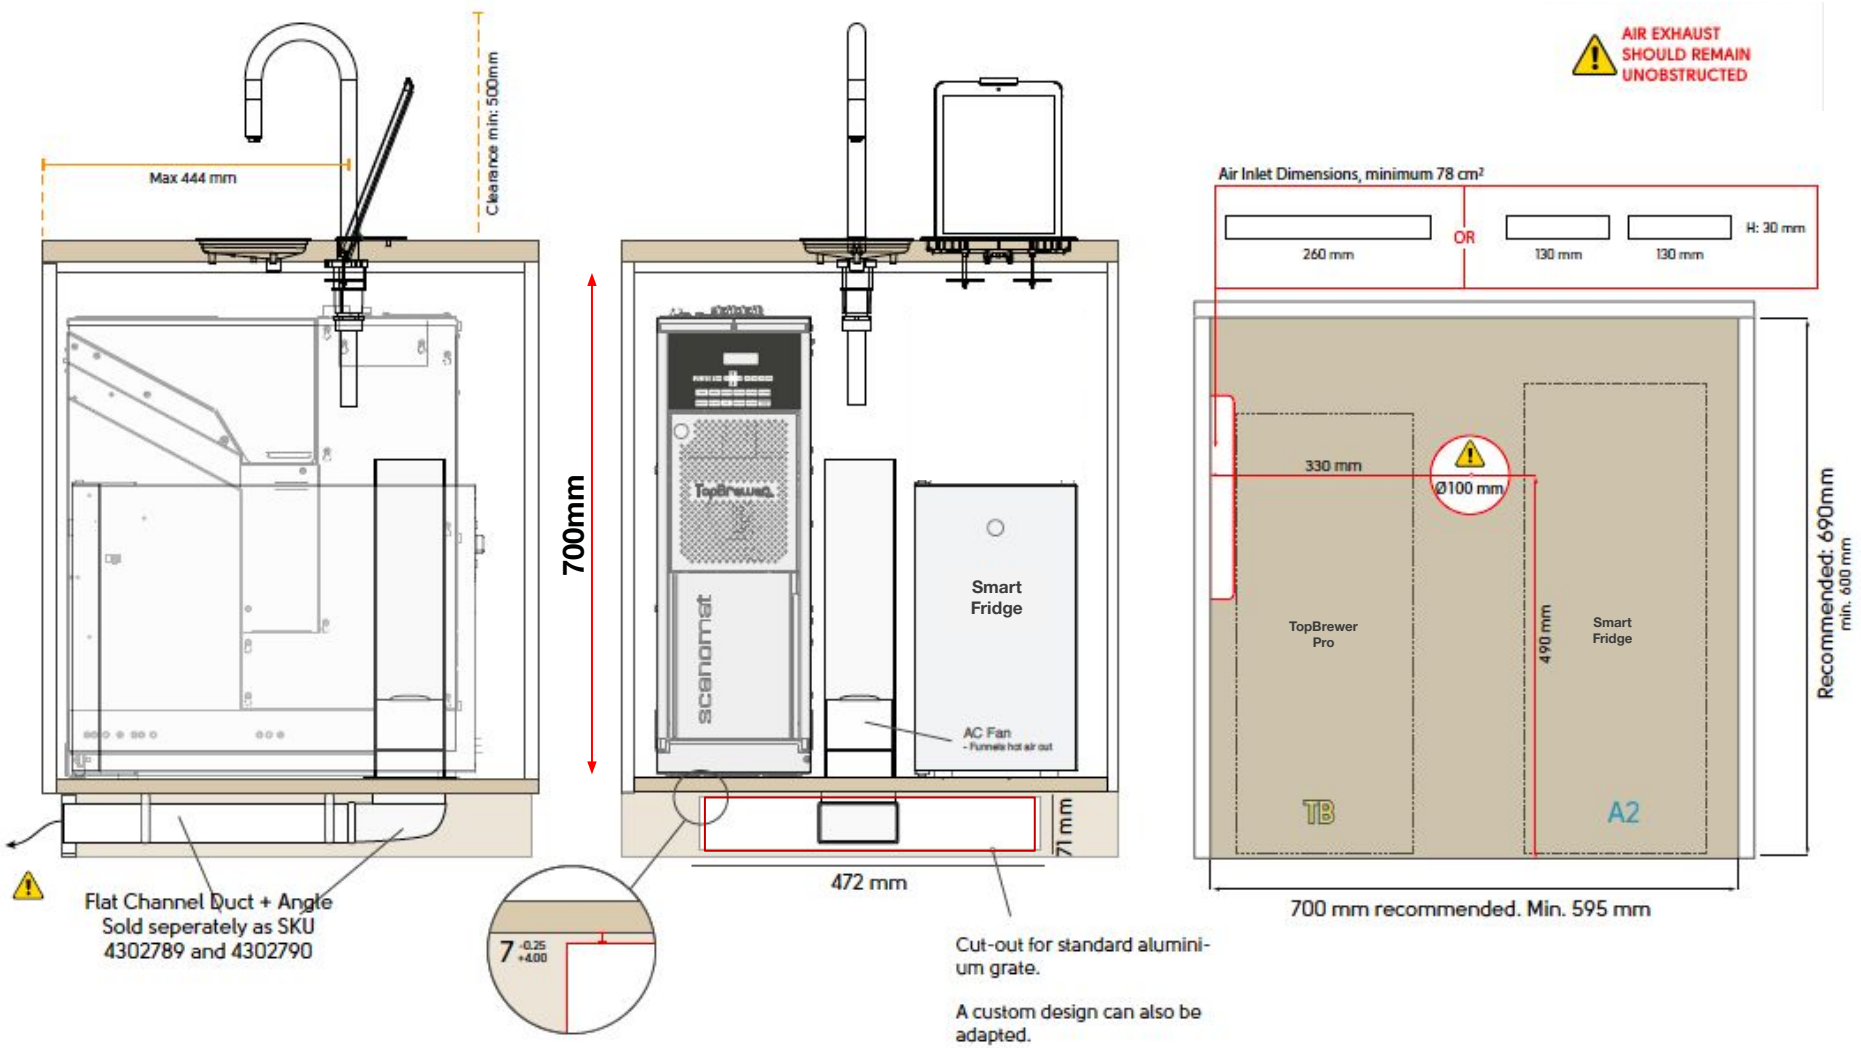

Side

Front


Top View

Cut-outs in countertop for installation

Make sure the right iPad holder is specified before starting the work.





iPad Standard Holder

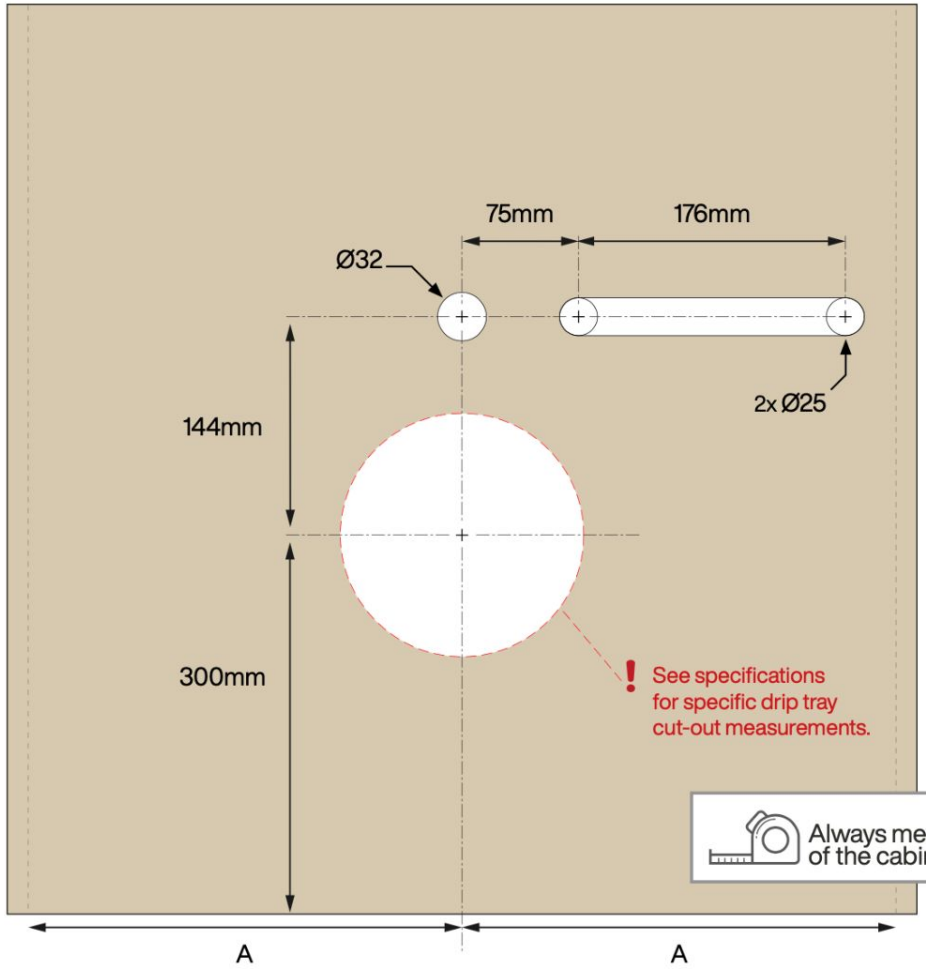



iPad Deluxe Holder

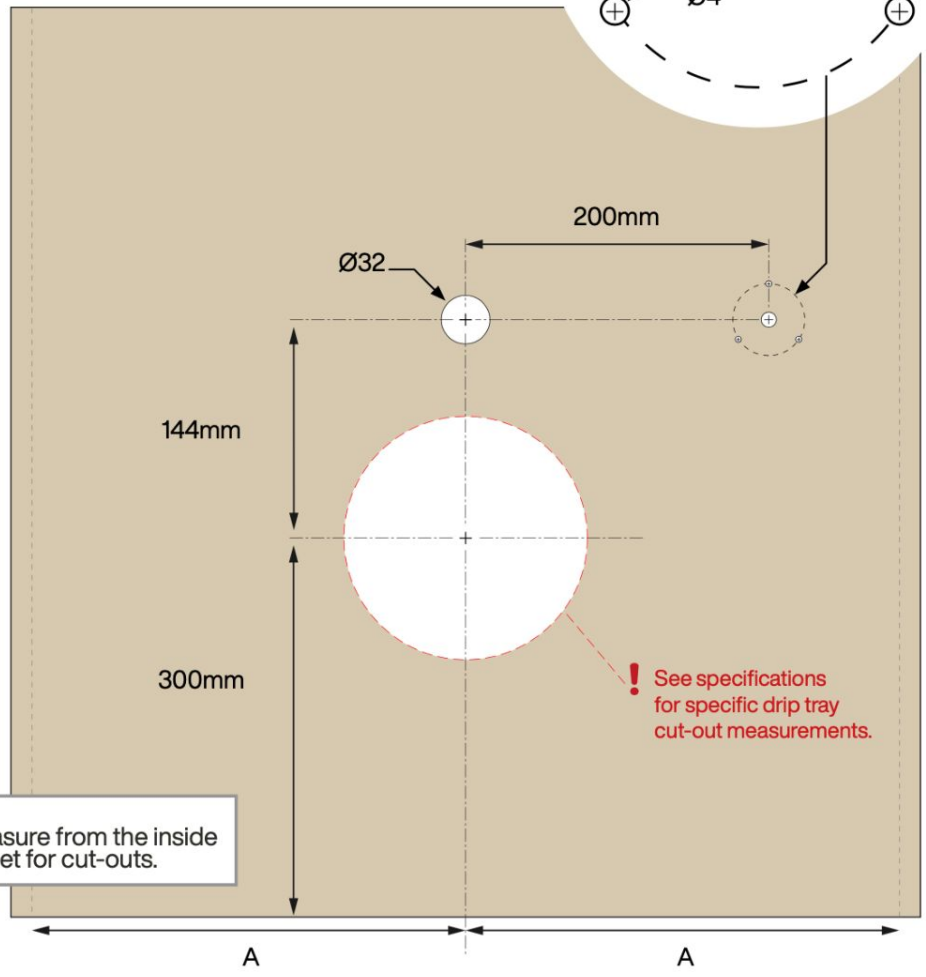

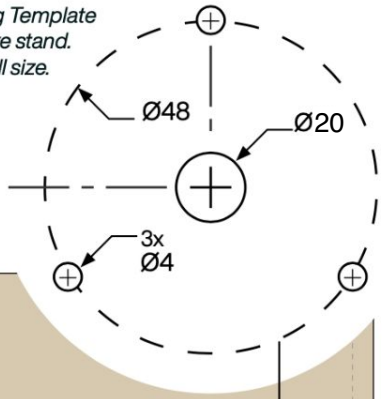


Always measure from the inside of the cabinet for cut-outs.

Drip Tray Top-Mounted



Top-Mounted drip tray with lip is recommended for wooden countertops or countertops where the cut can only be made throughout.

SKU: 2006162A

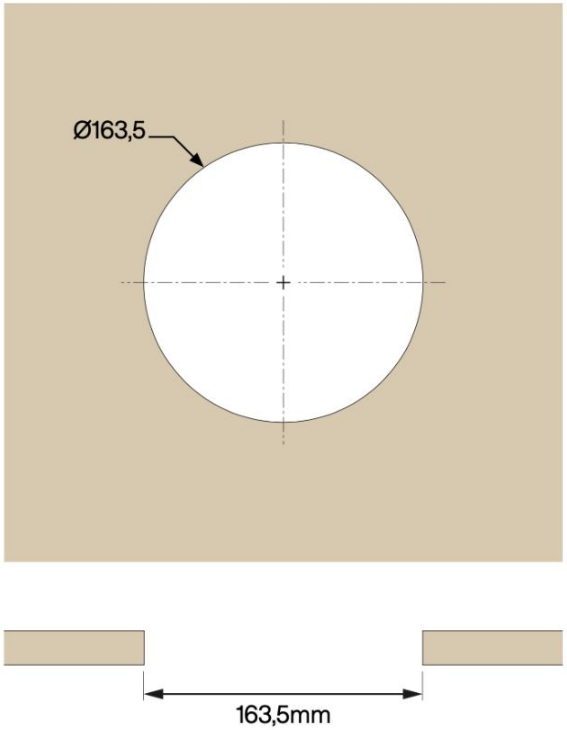


Drip Tray Countersunk



Countersunk drip tray is recommended for solid countertops where the cut-out can be milled with a template.


SKU: 2006162

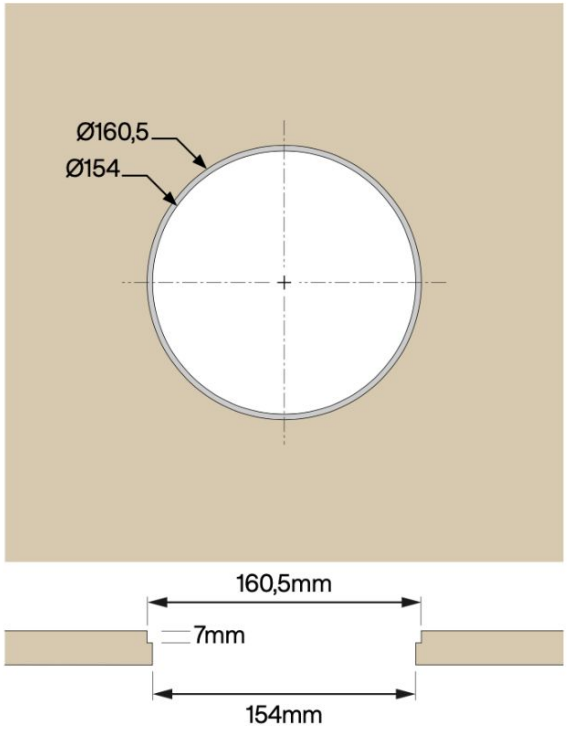

Placement of electricity outlets in cabinet (EU Machine Installations)

The correct placement of the safety swich and power strips are important to ensure space for later installation of ventilation system and machines.

Version 1

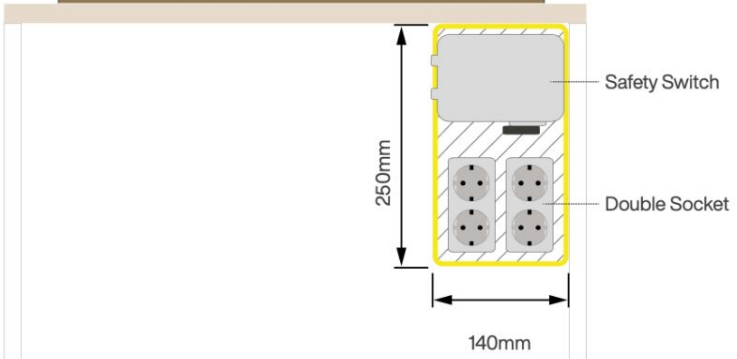

Place the electricity outlets in the top right corner of the cabinet.

Use the electricity requirements for the following machine installations:


TopBrewer Pro

3 phase	3 x13A, 3P+N+E with Safety Switch.
1558EUVER XX.XX	2x Double Socket - 230V, 1P+N+E, type Schuko.

TopBrewer Compact

1 phase	1 x 20A (10A), 1P+N+E with Safety Switch.
1557EUVER XX.XX	2x Double Socket - 230V, 1P+N+E, type Schuko.

Version 2

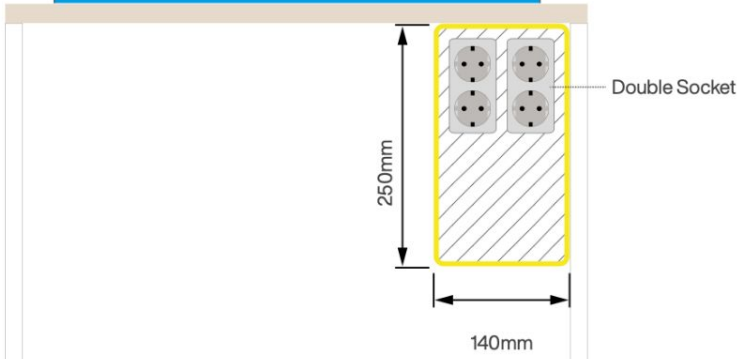

Place the electricity outlets in the top right corner of the cabinet.


Use the electricity requirements for the following machine installations:


TopWater / Chiller

1160EUVER XX.XX	2x Double Socket - 230V, 1P+N+E, type Schoko.

IMPORTANT
Electrical installations to be placed with this area.

Plumbing

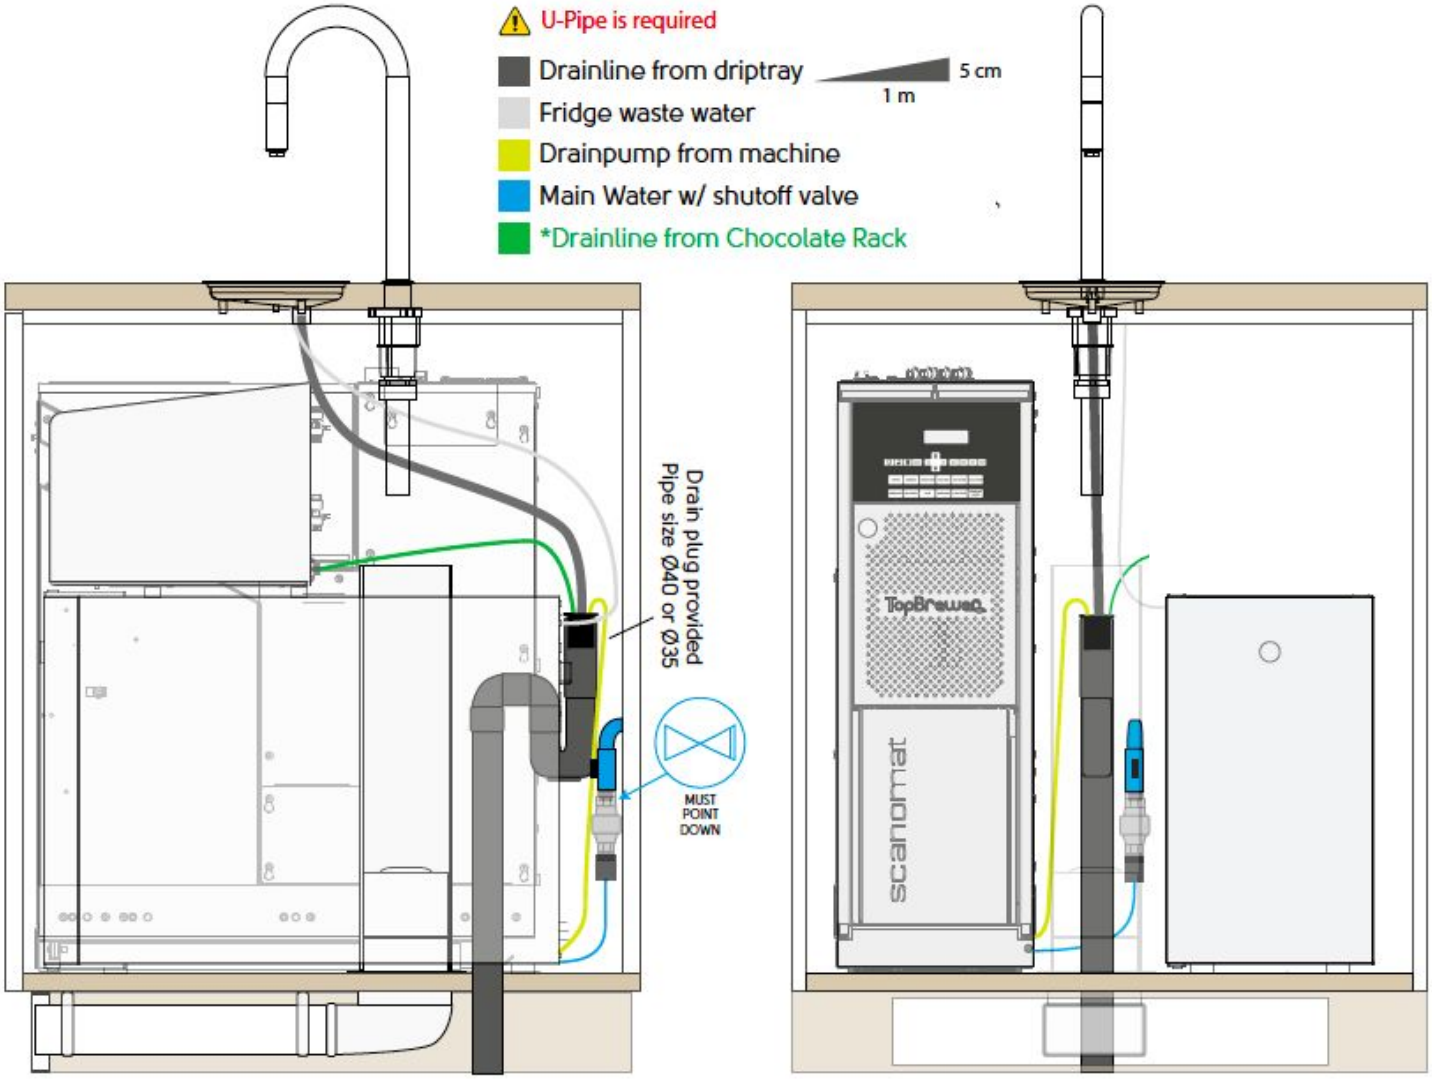

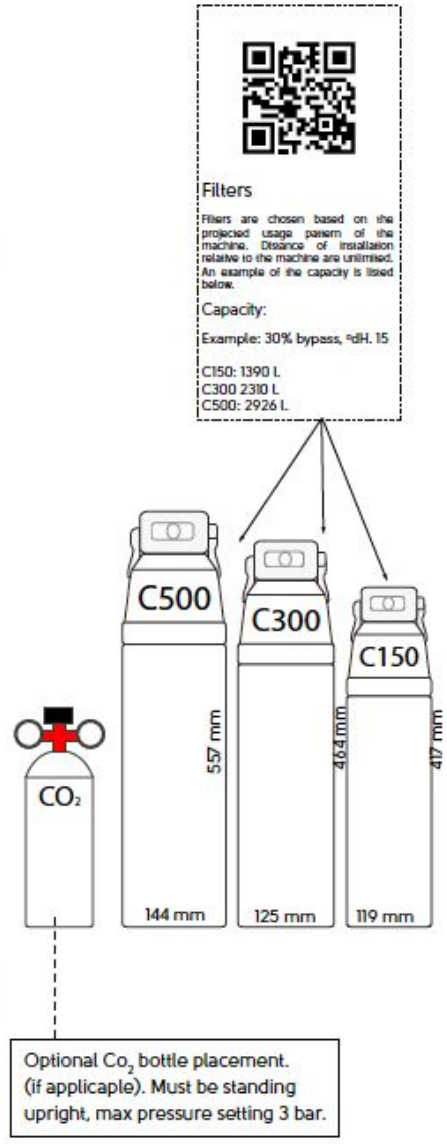

*Optional units

TopBrewer

Please reach out to us for additional questions!

T: 035-205 5049 | E: service@topbrewer.nl